

Office of the State **Building** Surveyor

NCC 2025 Volume One Victoria Appendix (Variations and Additions)





Purpose

To support Victorian practitioners in preparing for adoption of NCC 2025.

Learning Objectives


Summarise Victorian variations and additions in Volume One, by identifying clauses that are;



- Deleted
- Amended, and
- Newly Added.




NCC 2025 Timeline




1st Feb 2026

NCC 2025 preview
released for public review
and industry preparation.



1st May 2026

Victoria to Adopt NCC 2025
(Note some provisions have a 1-
year transition period)

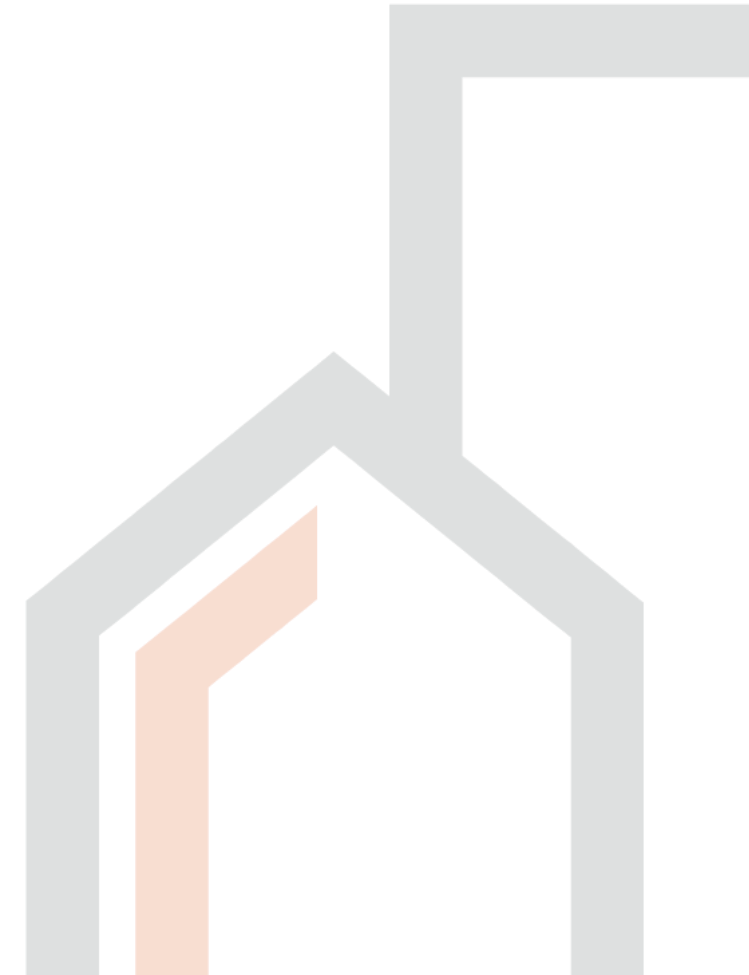




NCC 2025 Timeline

Section 10 – Building Act 1993

10 Application of new building regulations or binding determinations to building work

- (1) A building regulation or an amendment to a building regulation or a binding determination that applies to a building regulation, does not apply to the carrying out of any building work in accordance with a building permit existing immediately before the building regulation or amendment commences or the binding determination comes into effect.
- (2) A building regulation, or an amendment to a building regulation or a binding determination that applies to a building regulation, does not apply to the carrying out of building work if the relevant building surveyor is satisfied, and certifies in writing, that substantial progress was made on the design of the building before the building regulation or amendment commenced or the binding determination came into effect.
- (3) Subject to any determination of the Building Appeals Board, building work referred to in subsection (1) or (2) must be carried out in accordance with the provisions of any regulations, by-laws, local laws or enactments in force at the material times as if the building regulation or amendment or binding determination had not come into operation.
- (4) Despite subsections (1) to (3), the relevant building surveyor and the owner of the building or land concerned may agree that a building regulation, or an amendment to a building regulation, or a binding determination, is to apply to the carrying out of building work referred to in those subsections.

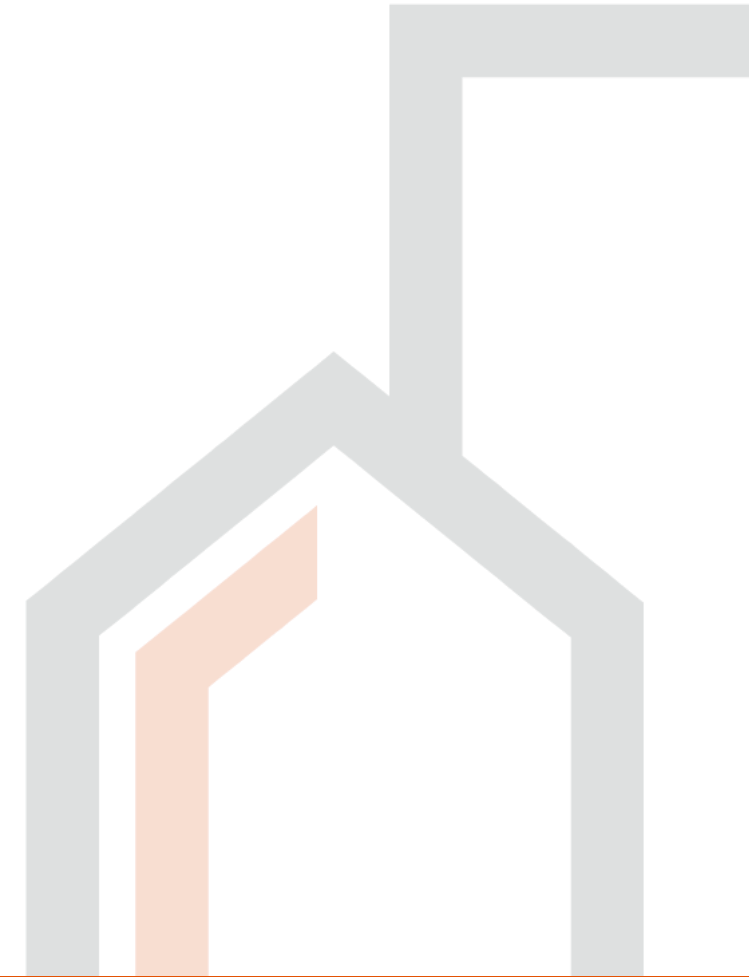



NCC 2025 Timeline

Minister's Guideline MG-13 Dated 18 May 2023

Building Act 1993


MINISTER'S GUIDELINE MG/13

Exercise of Discretion when Applying a New Building Regulation or an Amendment to a Building Regulation

This updates previous Minister's Guideline MG/13 issued May 2009.

Pursuant to section 188(1)(c) of the **Building Act 1993** (the Act) I hereby issue the following guideline concerning discretion under section 10 of the Act to apply to new building regulations or an amendment to a building regulation. Section 188(7) of the Act provides that municipal building surveyors and private building surveyors must have regard to a relevant guideline in carrying out a function under the Act.

[Minister Guideline MG-13](#)

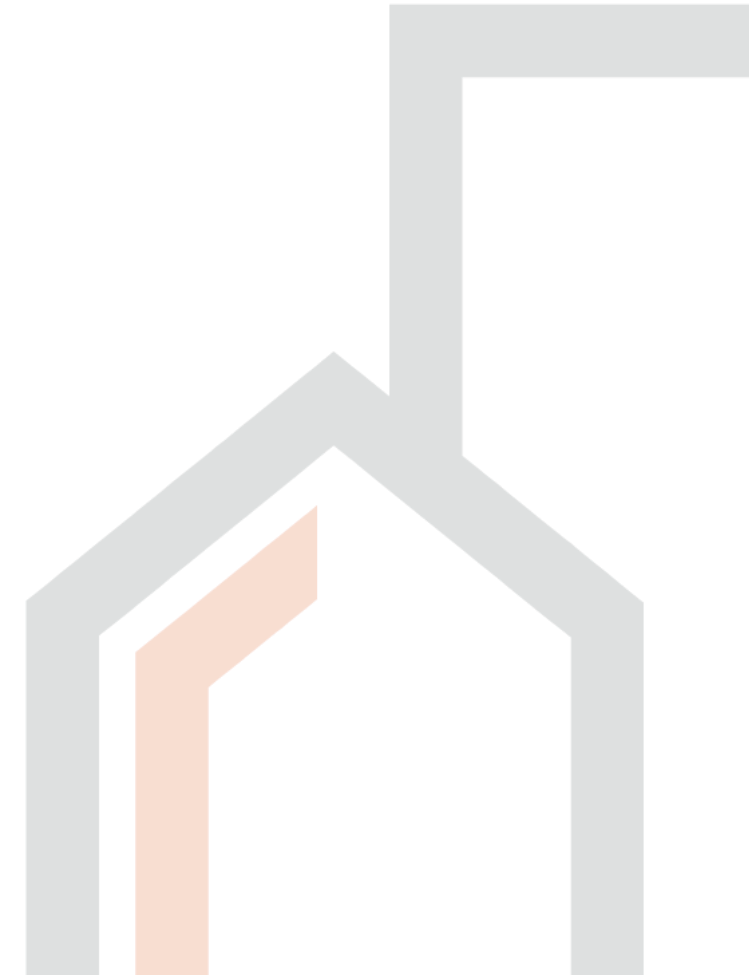

Governing Requirements

Replaces national Clause A2G2 with state-specific Clause VIC A2G2 – Performance Solutions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
VIC A2G2 (5)	No Change	Cladding Ban: Retains the ban on Performance Solutions for combustible cladding (Classes 2, 3, 5–9).
VIC A2G2 (Limitation)	New	<p>Structural Performance Solution: New national clause for the performance solution pathway for B1P1 (A2G2(5)) is now a Victorian limitation.</p> <p>For performance solutions relating to performance requirement B1P1(2), the assessment method must be via comparison with the deemed-to-satisfy provisions (A2G2(2)(d)).</p> <p>Expert Judgement: Victoria retains the ability to use this assessment method to assess against all performance requirements apart from B1P1 (2).</p> <p><i>Note: This limitation takes effect 1 year after the adoption date for NCC 2025.</i></p>



Volume One — Definitions

<u>Definition</u>	<u>Change Type</u>	<u>Key Details</u>
Children's service & Early Childhood Centre	Deleted	<ul style="list-style-type: none"> Redundant as a result of aligning children's services requirements to the National Quality Framework. National definition for early childhood centre is adopted.
Children's room	Added	<p>To provide clarity to practitioners to what is a children's room referred to in new VIC D2D24.</p> <p><i>This definition is replicated from the Children Service's Regulations 2009.</i></p>
Restricted children's service	Amended	<p>To align with the current legislation (Children's Services Regulations 2020).</p> <p>De-italicises references to 'children's service' within the definition.</p>
Flashing	Deleted	Victorian definition is unnecessary and the national definition is adopted.



Volume One — Definitions

Children's room: a room used exclusively for the care or education of children while the children are attending the service, but does not include a toilet, a kitchen, an administration room or any other ancillary area

Restricted children's service: A ~~children's service~~ children's service that is a limited hours service—

(a) ~~any one of the following~~ as defined in the Children's Services Regulations 2020.—


(i) ~~a limited hours Type 1 service; or~~

(ii) ~~a limited hours Type 2 service; or~~

(iii) ~~a short term Type 1 service; or~~

(iv) ~~a short term Type 2 service; or~~

(b) ~~an associated children's service within the meaning of the Children's Services Act 1996 approved to be operated by an approved provider at the same place as an approved education and care service that is required to meet the conditions of a limited hours Type 1 service, a limited hours Type 2 service, a short term Type 1 service, or a short term Type 2 service.~~

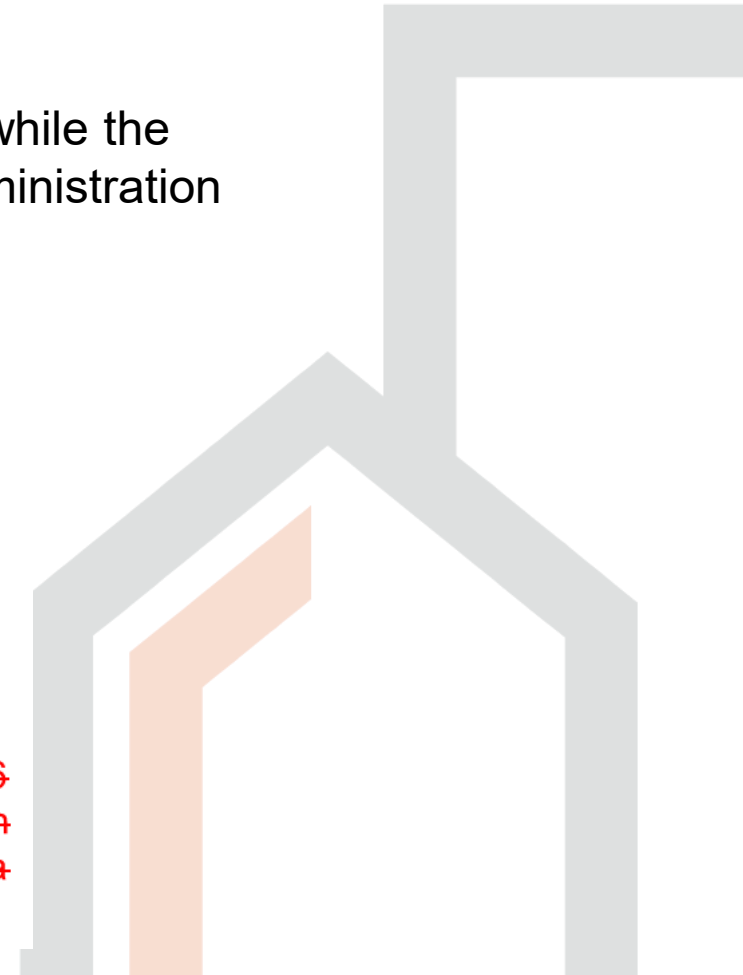



Volume One — Amendments, Deletions and Additions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
VIC B1D6(3) Construction of buildings in flood hazard areas	Amended	Editorial correction
VIC D2D1 DTS provisions	New	Consequential amendment to including new clause VIC D2D24 Doorways to a Children's room.
VIC D2D5 Exit travel distances	Deleted	Deleted VIC D2D5 for exit travel distances in children's services and adopt national provisions.
VIC D2D9 Width of doorways in exits or paths of travel to exits	Amended	<ul style="list-style-type: none"> Removes previous Vic D2D9 variation to be consistent with national. Relocated requirements for 900 mm width for bedroom doorways for Class 3 & 9a (Residential aged care buildings)



Volume One — Amendments, Deletions and Additions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
VIC D2D24 Doorways to a children's room	Amended	<ul style="list-style-type: none"> Relocated requirements of I6D3. Children's services updated to refer to early childhood centre Includes new definition for children's room for clarity.
VIC D3D26 Operation of latch	Amended	<ul style="list-style-type: none"> Amended for readability Children's services updated to refer to early childhood centre
VIC E1D6 & VIC E1D7 Sprinklers	Amended & Deleted	Sprinkler requirements for shared accommodation building relocated to VIC E1D6. Consequentially, VIC E1D7 is deleted.
VIC E1D13 Where sprinklers are required: occupancies of excessive hazard	Deleted	<ul style="list-style-type: none"> Alignment with national clause for sprinkler requirements of occupancies of excessive hazard



Volume One — Amendments, Deletions and Additions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
VIC S17C15 VIC S18C5 Balconies in Class 2,3, 9a	Amended (Replaces older clauses)	<ul style="list-style-type: none"> • S17C2 deleted and replaced by clearer VIC S17C15. • Maintains the requirement of sprinkler protection for covered balconies in Classes 2, 3, 9a, 9c. • VIC S18C3 (1) deleted and replaced by VIC S18C5. • Removes the need to vary specific clauses in referenced documents
VIC S20C4 (4) VIC S20C8 Smoke Detection	Deleted	<ul style="list-style-type: none"> • Deleted entirely to align with the national approach.
VIC F4P2 Laundry facilities	Deleted	Deleted consequentially due to changes applying to restricted children's services.
VIC F4D2 (6) Facilities in residential buildings	Amended	Inserts a new clause that relocates specific requirements for the installation of grabrails in residential aged care and Class 9c buildings.



Volume One — Amendments, Deletions and Additions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
VIC F4D4 Facilities in Class 3 to 9 buildings	Amended	Amends the requirements for sanitary and amenity facilities specifically for early childhood centres (ECC) and restricted children's services.
VIC F4D13 First aid rooms	Amended	Remove reference to places of public entertainment. Places of public entertainment provisions will be relocated into the Building Regulations 2018.
Part F5 Room heights	No change	As per NCC 2022
VIC G1P2 & VIC G1D2 (Swimming Pools)	Deleted	Alignment with national provisions.




Volume One — Amendments, Deletions and Additions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
Part G5 Bushfire Prone Areas	Deleted	Victorian variations have been removed, aligning with national provisions.
VIC I4P2, I4D2, I4D3, I4D4, I4D5 Special use buildings	Deleted	Various clauses have been relocated to another section in Volume One or were identified as no longer necessary and deleted.
New VIC I4D2 (formerly I4D6)	Renumbered / Amended	<ul style="list-style-type: none"> • Renumbered previous I4D6 to I4D2. • Amended subclause (e) - continuous audible tone may no longer be appropriate where personal staff communication devices are used.
Part I5 Places of public entertainment	Deletion	Victorian variations for Places of Public Entertainment (POPE) have been removed and will be relocated into the Building Regulations 2018.



Volume One — Amendments, Deletions and Additions

<u>Clause</u>	<u>Change Type</u>	<u>Key Details</u>
Part I6 Class 9b children's services	Deletion	Egress provision has been relocated to new VIC D2D24. Consequentially, Part I6 has been deleted.

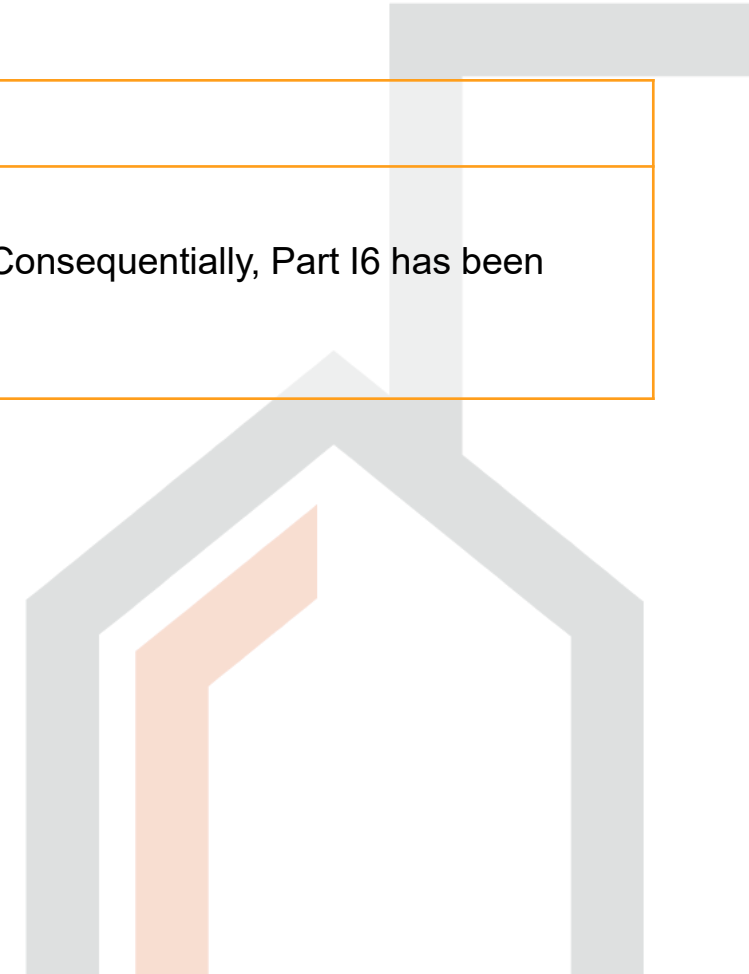

Access & Egress

Amended

Clause	Change Type	Key Details
VIC B1D6(3) Construction of buildings in flood hazard areas	Amended	Editorial correction
VIC D2D1 DTS provisions	New	Consequential amendment to including new clause VIC D2D24 Doorways to a Children's room.
VIC D2D5 Exit travel distances	Deleted	Deleted VIC D2D5 for exit travel distances in children's services and adopt national provisions.
VIC D2D9 Width of doorways in exits or paths of travel to exits	Amended	<ul style="list-style-type: none"> Removes previous Vic D2D9 variation to be consistent with national. Relocated requirements for 900 mm width for bedroom doorways for Class 3 & 9a (Residential aged care buildings)

VIC D2D9 Width of doorways in exits or paths of travel to exits

[2019: VIC D1.6(f)(iv)]

In a ~~required exit~~ or path of travel to an ~~exit~~, the unobstructed width of a doorway must be not less than —

- ~~(a) in patient care areas through which patients would normally be transported in beds —~~
 - ~~(i) if the doorway provides access to, or from, a corridor of width —~~
 - ~~(A) less than 2.2 m — 1200 mm; or~~
 - ~~(B) 2.2 m or greater — 1070 mm; and~~
 - ~~(ii) where the doorway referred to in (i) is fitted with two leaves and one leaf is secured in the closed position in accordance with D3D26(3)(c), the other leaf must permit an unobstructed opening not less than 800 mm wide; or~~
- ~~(b) in patient care areas in a horizontal exit — 1250 mm; or~~
- ~~(c) the unobstructed width of each exit provided to comply with D2D8(1), (2), (3) or (4), minus 250 mm; or~~
- ~~(d) in any other case except where it opens to a sanitary compartment or bathroom — 750 mm wide.~~



VIC D2D9 Width of doorways in exits or paths of travel to exits

- (1) Drafting as per national D2D9
- (2) Notwithstanding (1), in Class 3 and Class 9a residential aged care buildings, the unobstructed width of all bedroom entrance doorways must be not less than 900 mm.

Access & Egress

Amended

VIC D2D24 Doorways to a children's room

In an *early childhood centre*, a *children's room* must—

(a) have a doorway providing direct access to or from—

(i) an outdoor play area; or

(ii) a passage leading to an outdoor area, *open space* or other safe egress point; or

(iii) a fire-isolated *exit*; and

(b) where the *children's room* accommodates more than 21 children, at least two doorways complying with (a)) that are separated as far as practicable.

Children's room: a room used exclusively for the care or education of children while the children are attending the service, but does not include a toilet, a kitchen, an administration room or any other ancillary area

Clause	Change Type	Key Details
VIC D2D24 Doorways to a children's room	Amended	<ul style="list-style-type: none"> Relocated requirements of I6D3. Children's services updated to refer to <u>early childhood centre</u> Includes new definition for children's room for clarity.
VIC D3D26 Operation of latch	Amended	<ul style="list-style-type: none"> Amended for readability Children's services updated to refer to early childhood centre
VIC E1D6 & VIC E1D7 Sprinklers	Amended & Deleted	Sprinkler requirements for shared accommodation building relocated to VIC E1D6. Consequentially, VIC E1D7 is deleted.
VIC E1D13 Where sprinklers are required: occupancies of excessive hazard	Deleted	Alignment with national clause for sprinkler requirements of occupancies of excessive hazard

Access & Egress

Amended

Deleted D3D26(1) and VIC D3D26(6), and insert VIC D3D26(1) as follows:

D3D26 Operation of latch

- ~~(1) A door in a *required exit*, forming part of a *required exit* or in the path of travel to a *required exit* must be readily openable without a key from the side that faces a person seeking egress, by—~~
- ~~(a) a single hand downward action on a single device which is located between 900 mm and 1.1 m from the floor and if serving an area *required to be accessible* by Part D4—~~
- ~~(i) be such that the hand of a person who cannot grip will not slip from the handle during the operation of the latch; and~~
- ~~(ii) have a clearance between the handle and the back plate or door face at the centre grip section of the handle of not less than 35 mm and not more than 45 mm; or~~
- ~~(b) a single hand pushing action on a single device which is located between 900 mm and 1.2 m from the floor.~~

D3D26 Operation of latch

[2019: D2-21]

~~Insert subclause VIC D3D26(6) in clause D3D26 as follows:~~

- ~~(6) For the purposes of (1), an exit door from a *children's service* which does not open to an outdoor space enclosed in accordance with G1D4, must have the device located between 1.5 m and 1.65 m above the floor and the door must be *self-closing*.~~



Clause	Change Type	Key Details
VIC D2D24 Doorways to a children's room	Amended	<ul style="list-style-type: none"> Relocated requirements of I6D3. Children's services updated to refer to early childhood <u>centre</u>. Includes new definition for children's room for clarity.
VIC D3D26 Operation of latch	Amended	<ul style="list-style-type: none"> Amended for readability Children's services updated to refer to early childhood centre
VIC E1D6 & VIC E1D7 Sprinklers	Amended & Deleted	Sprinkler requirements for shared accommodation building relocated to VIC E1D6. Consequentially, VIC E1D7 is deleted.
VIC E1D13 Where sprinklers are required: occupancies of excessive hazard	Deleted	<ul style="list-style-type: none"> Alignment with national clause for sprinkler requirements of occupancies of excessive hazard

VIC D3D26(1)

- (1) A door in a *required exit*, forming part of a *required exit* or in the path of travel to a *required exit* must be readily openable without a key from the side that faces a person seeking egress, by—
- (a) a single hand downward action on a single device which—
- (i) for a door in a *required exit* in an *early childhood centre* that does not open to an outdoor space enclosed in accordance with G1D4—
- (A) is located between 1.5 m and 1.65 m above the floor; and
- (B) returns the door to the fully closed position immediately after each opening; and
- (ii) in all other locations, located between 900 mm and 1.1 m above the floor; and
- (iii) if serving an area *required to be accessible* by Part D4—
- (A) be such that the hand of a person who cannot grip will not slip from the handle during the operation of the latch; and
- (B) have a clearance between the handle and the back plate or door face at the centre grip section of the handle of not less than 35 mm and not more than 45 mm; or
- (b) a single hand pushing action on a single device which—
- (i) for a door in a *required exit* in an *early childhood centre* that does not open to an outdoor space enclosed in accordance with G1D4—
- (A) is located between 1.5 m and 1.65 m above the floor; and
- (B) returns the door to the fully closed position immediately after each opening; and
- (ii) in all other locations, is located between 900 mm and 1.2 m above the floor.



Services

Amended

VIC S17C15 Balconies in Class 2, 3, 9a and 9c buildings

Covered balconies in Class 2, 3, 9a or 9c buildings must be sprinkler protected.

VIC S18C5 Balconies in Class 2 and 3 buildings

Covered balconies in Class 2 or 3 buildings must be sprinkler protected.

Clause	Change Type	Key Details
VIC S17C15 VIC S18C5 Balconies in Class 2,3, 9a	Amended (Replaces older clauses)	<ul style="list-style-type: none"> S17C2 deleted and replaced by clearer VIC S17C15. Maintains the requirement of sprinkler protection for covered balconies in Classes 2, 3, 9a, 9c. VIC S18C3 (1) deleted and replaced by VIC S18C5. Removes the need to vary specific clauses in referenced documents
VIC S20C4 (4) VIC S20C8 Smoke Detection	Deleted	<ul style="list-style-type: none"> Deleted entirely to align with the national approach.
VIC F4P2 Laundry facilities	Deleted	Deleted consequentially due to changes applying to restricted children's services.
VIC F4D2 (6) Facilities in residential buildings	Amended	Inserts a new clause that relocates specific requirements for the installation of grabrails in residential aged care and Class 9c buildings.

Health and Amenity

Amended

VIC F4D2 (6) — Grabrails

(6) In addition to (3) and (5), in a Class 3 and 9a residential aged care building and Class 9c building, grabrails must be provided in association with every closet pan, shower or bath utilised by residents in accordance with AS 1428.1.

Clause	Change Type	Key Details
VIC S17C15 VIC S18C5 Balconies in Class 2, 3, 9a	Amended (Replaces older clauses)	<ul style="list-style-type: none"> S17C2 deleted and replaced by clearer VIC S17C15. Maintains the requirement of sprinkler protection for covered balconies in Classes 2, 3, 9a, 9c. VIC S18C3 (1) deleted and replaced by VIC S18C5. Removes the need to vary specific clauses in referenced documents
VIC S20C4 (4) VIC S20C8 Smoke Detection	Deleted	<ul style="list-style-type: none"> Deleted entirely to align with the national approach.
VIC F4P2 Laundry facilities	Deleted	Deleted consequentially due to changes applying to restricted children's services.
VIC F4D2 (6) Facilities in residential buildings	Amended	Inserts a new clause that relocates specific requirements for the installation of grabrails in residential aged care and Class 9c buildings.

Health and Amenity

Amendment

F4D4 – Facilities in Class 3 to 9 buildings

Delete F4D4(9) and insert VIC F4D4(9) as follows:

- (9) A Class 9b early childhood centre, other than a *restricted children's service*, must be provided with—
- a kitchen or food preparation area with a kitchen sink, separate hand washing facilities, space for a refrigerator and space for cooking facilities, with—
 - the facilities protected by a door or gate with child proof latches to prevent unsupervised access to the facilities by children younger than 5 years old; and
 - the ability to facilitate supervision of children from the facilities if the early childhood centre accommodates children younger than 2 years old; and
 - one bath, shower or shower-bath; and
 - if the centre accommodates children younger than 3 years old—
 - a laundry facility comprising a washtub and space in the same room for a washing machine; and
 - a bench type baby bath, which is within 1 m of the nappy change bench; and
 - a nappy changing bench which—
 - is within 1 m of separate adult hand washing facilities and bench type baby bath; and
 - must be not less than 0.9 m² in area and at a height of not less than 850 mm, but not more than 900 mm above the finished floor level; and
 - must have a space not less than 800 mm high, 500 mm wide and 800 mm deep for the storage of steps; and
 - is positioned to permit a staff member changing a nappy to have visibility of the play area at all times.

Insert subclause VIC F4D4(4215) in clause F4D4 as follows:

- (4215) A *restricted children's service* must be provided with—
- a kitchen or facilities for the preparation ~~and~~ ~~or~~ cooking of food for children including washing up facilities and a space for refrigerated food storage facilities; and
 - ~~except in a restricted children's service~~, if the service accommodates children younger than 3 years of age—
 - a laundry facility comprising a washtub and space in the same room for a washing machine; and
 - a bench-type baby bath, ~~with hot and cold water connected~~, and a nappy change bench in close proximity; ~~and~~
- ~~(e) except in a restricted children's service, one bath or shower-bath.~~

VIC Table F4D4g: Sanitary facilities in Class 9b buildings – early childhood centres

User group	Facility type	Design occupancy	Number
Children	Closet pans	1 - 30	2
		>30	Add 1 per 15
	Washbasins	1 - 30	2
		>30	Add 1 per 15

Table Notes

- Urinals are not required in a Class 9b early childhood centre.
- Facilities for use by children must be—
 - junior closet pans, except that those in a *restricted children's service* may be adult height toilets if they are fitted with a removable seat suitable for children and a wide and stable step in front; and
 - washbasins with a rim height not exceeding 600 mm, except that those in a *restricted children's service* may be adult height washbasins if they are provided with a wide and stable step in front; and
 - except in a *restricted children's service*, accessible from both indoor and outdoor play areas; and
 - in an *early childhood centre children's service*, other than a *restricted children's service*, the closet pans must be located in relation to children's rooms and outdoor play spaces so that children using toilets can be observed by staff from children's rooms and outdoor play space.

VIC F4D13 First aid rooms

- (1) If an *assembly building*, **place of public entertainment (as defined in the Building Act 1993)** or an *open spectator stand* accommodates more than 5000 spectators at an arena, sportsground, showground, racecourse, cricket ground, football ground, coursing ground, motor racing arena, or the like, a suitable room or rooms must be provided in accordance with VIC Table F4D13 for use by para-medical attendants for first aid purposes.

[2019: VIC F2.101]

Clause	Change Type	Key Details
VIC F4D4 Facilities in Class 3 to 9 buildings	Amended	Amends the requirements for sanitary and amenity facilities specifically for early childhood centres (ECC) and restricted children's services.
VIC F4D13 First aid rooms	Amended	Remove reference to places of public entertainment. Places of public entertainment provisions will be relocated into the Building Regulations 2018.
Part F5 Room heights	No change	As per NCC 2022
VIC G1P2 & VIC G1D2 (Swimming Pools)	Deleted	Alignment with national provisions.

Class 3 and 9a residential aged care buildings and Class 9c buildings

Amendment

VIC I4D2 Application of Part

[2019: VIC H101.1]

The Deemed-to-Satisfy Provisions of this Part apply to Class 3 and Class 9a residential aged care buildings and Class 9c buildings.

VIC I4D6²

A communication system must—

- (a) contain a back-up power supply; and
- (b) have a control that enables the call to be cancelled manually at the point of origin only; and
- (c) incorporate a device at the point of origin that indicates the system has operated; and
- (d) incorporate an indication panel in the manager's office or staff area that clearly indicates the point of origin of a call; and
- (e) for systems not using personal staff communication devices, have an audible tone that has a continuous signal until deactivated at the point of origin; and
- (f) be operational at all times; and
- (g) have two call points in each ensuite or combined shower/water closet with one call point located in the shower recess and the other on the wall beside the closet pan ahead of the bowl rim; and
- (h) have call points (other than those mentioned in (g)) which are located—
 - (i) within the reach of a resident whilst in bed; and
 - (ii) in all common *habitable rooms*; and
 - (iii) in all bathrooms, *sanitary compartments* and shower rooms where the call point must be of waterproof construction and within the reach of any fallen resident.

Applications

VIC I4D2 only applies to Class 3 and Class 9a residential aged care buildings and Class 9c buildings.


Clause	Change Type	Key Details
Part G5 Bushfire Prone Areas	Deleted	Victorian variations have been removed, aligning with national provisions.
VIC I4P2, I4D2, I4D3, I4D4, I4D5 Special use buildings	Deleted	Various clauses have been relocated to another section in Volume One or were identified as no longer necessary and deleted.
New VIC I4D2 (formerly I4D6)	Renumbered / Amended	<ul style="list-style-type: none"> Renumbered previous I4D6 to I4D2. Amended subclause (e) - continuous audible tone may no longer be appropriate where personal staff communication devices are used.
Part I5 Places of public entertainment	Deletion	Victorian variations for Places of Public Entertainment (POPE) have been removed and will be relocated into the Building Regulations 2018.



Building Regulations 2018

Victorian sprinkler references and Regulation 147AA under NCC 2025

- Victoria removed the relevant sprinkler reference clauses from the Victorian Appendix.
- Regulation 147AA is therefore also expected to be deleted.
- Going forward, the national NCC sprinkler references would apply as usual.

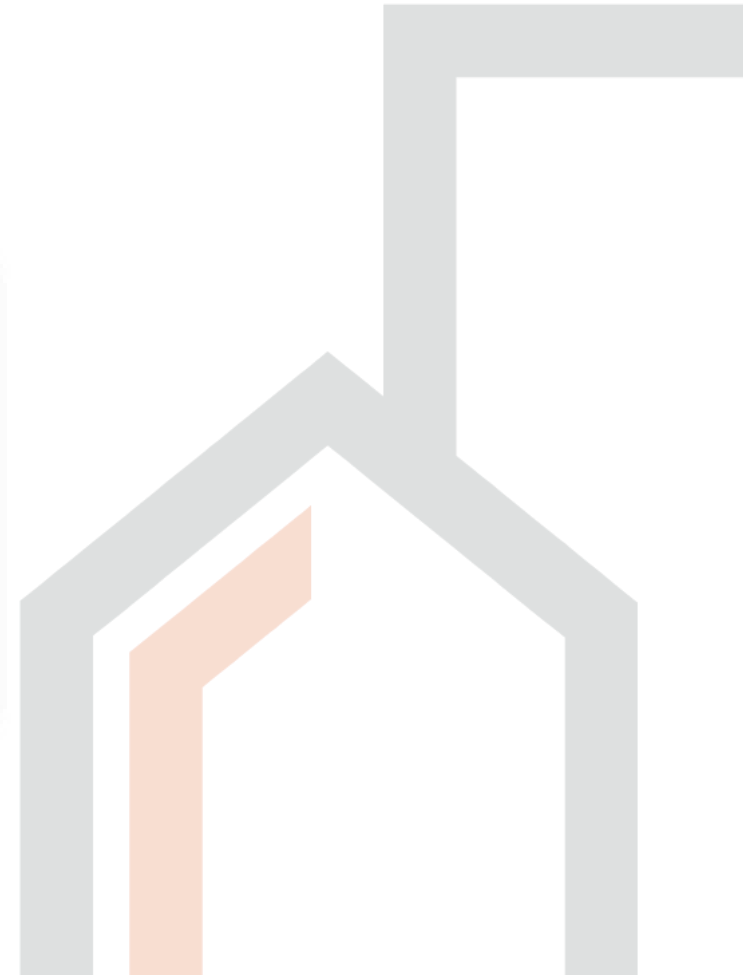

Victorian sprinkler references and Regulation 147AA under NCC 2025

147AA Modification to the BCA Volume One in relation to fire sprinkler system requirements

The BCA Volume One applies as if in the VIC Table in Schedule 2 to Schedule 10—

- (a) in the row referring to AS2118.1, after "amendment 1" there were inserted "and 2";
- (b) in the row referring to FPAA101D, for "2018" there were substituted "2021";
- (c) in the row referring to FPAA101H, after "Supply" there were inserted "(incorporating amendment 1)".

AS-2118.1	2017	Automatic fire sprinkler systems, Part 1: General systems (incorporating amendment 1)	VIC S17C2, VIC S18C3	N/A	N/A	VIC-B1D5, VIC-B4D2
FPAA101D	2021	Automatic Fire Sprinkler System Design and Installation—Drinking Water Supply	VIC S17C2, VIC S18C3	N/A	N/A	B1D5
FPAA101H	2018	Automatic Sprinkler System Design and Installation—Hydrant Water Supply (incorporating amendment 1)	VIC S17C2, VIC S18C3	N/A	N/A	B4D3



THANK YOU

NCC 2025 Education Series

